

Special skirting tape Thread scrim

UZIN TOPTAC 35

Dry adhesive for DÖLLKEN Profiles core skirtings and base profiles

MAIN APPLICATION FIELD:

DÖLLKEN Profiles Core skirting

- ▶ S 60 flex life
- ▶ S 100 life
- ▶ D 60 life TOP
- ▶ C 60 life TOP
- ▶ C 100 life
- ▶ TS 60 life TOP
- ▶ TS 100 life

DÖLLKEN System skirtings

- ▶ Basic profile GP 20 mit System MD 63 / SL 48

SUITABLE ON / FOR:

- ▶ Plaster
- ▶ Brickwork
- ▶ Metal (untreated)
- ▶ Painted surfaces
- ▶ Plastics
- ▶ Wood
- ▶ Concrete
- ▶ Ceramics
- ▶ Gypsum (primed)
- ▶ Wallpaper*
- ▶ Levelling compound (primed)

*see notes for preparation



PRODUCT BENEFITS/FEATURES:

Special adhesive tape for installing DÖLLKEN core skirting boards. Toptac 35 ensures the quick and solvent-free installation for interior areas.

- ▶ DÖLLKEN-UZIN System Guarantee
- ▶ Does not become brittle, providing a strong and permanent bond
- ▶ Rapid, even on concrete and metal
- ▶ Easier with Toptac applicator

TECHNICAL DATA:

Packaging	carton
Pack size	4 rolls or 32 rolls
Shelf life	min. 60 months
Color	transparent with green laid scrims
Open time	unlimited
Setting time / cure time	none
Ready for foot traffic	immediately after installation
Roll width	35 mm
Roll length	50 m
Minimum application temperature	15 ° C at ground level
Loadable	immediately after installation
Joint sealing	immediately after installation

*At 20 °C and 65% relative humidity.



for DÖLLKEN core skirting boards

ON substrates up to 1 mm structure height

SUBSTRATE PREPARATION:

Substrate preparation: The substrate must be permanently dry, hard, load-bearing, flat, free from grease, dust and silicon, in accordance with the respective national standards (EN, DIN, VOB, OE, SIA).

Wallpaper must be cut / removed for the height covered by the skirting.

Storage / transport: Do not roll core skirting (creates tension).

Bind dust with solvent-free primer (UZIN PE 260 or UZIN PE 360).

APPLICATION:

Application with Toptac applicator:


1) Insert silicon disc into the applicator

- ▶ Pull up and lock the roll holder
- ▶ Fit the adhesive-repellent disc



2) Insert Toptac into the applicator

- ▶ Depending on the direction of work, place the Toptac in the applicator running to the left or the right
- ▶ Lower the roll holder

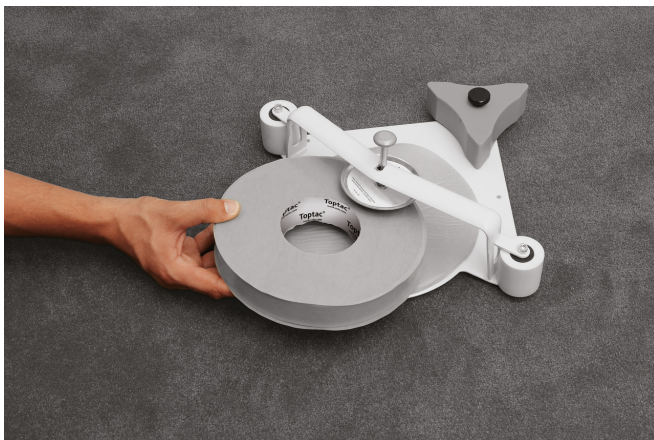

3) Apply Toptac to the wall

- ▶ Place Toptac and applicator against the wall

- ▶ For TS 100 and S 100 position a second strip of Toptac directly above the first strip



4) Apply skirtings to the wall

- ▶ Remove the Toptac protective paper
- ▶ Fit the core skirting board to the Toptac
- ▶ Tap in all over using the rubber mallet



Using the Toptac applicator at corners:

1)

- ▶ Move beyond the corner up to the centre of the folding device



2)

- ▶ Swivel rear pressure roller away from the wall
- ▶ Turn device around the corner so that the folding device maintains contact to the wall



3)

- ▶ Move device to the corner
- ▶ Bend over the folding device



4)

- ▶ Move fully into the corner using the folding device
- ▶ Cut Toptac in the corner



IMPORTANT NOTES:

- ▶ Store in a dry, cool area without exposure to direct sunlight on protected cut surface.
- ▶ In case of tension in the core skirting (e.g. uneven walls) we recommend to use a steel pin or a bracket.

UZIN and Döllken guarantee all properties stated in the installation instructions for a period of 5 years.

- ▶ Follow the generally acknowledged rules of the trade and of technology for the installation of floor covering of the respective applicable standards (EN, DIN, VOB, OE, SIA). In all cases, some adhesion tests must be carried out on-site before carrying out the installation.

The warranty becomes void if:

- ▶ the product is exposed to unusual impact especially of chemical or mechanical nature.
- ▶ used or processed differently than stated in the installation instructions.
- ▶ if no steel pins / staples were used in the ends of the skirting in case of tensions.
- ▶ moisture affects Toptac 35.
- ▶ installation was performed below 15 °C (on the wall).
- ▶ Toptac 35 is used in areas with increased humidity or thermal exposures (e. g. conservatories).

SEALS OF QUALITY & ECOLABELS:

- ▶ EMICODE EC 1 PLUS / Very low emission
- ▶ Blue Angel according to DE-UZ 113 / Environmentally friendly because of low emissions
- ▶ Manufacturer specific EPD
- ▶ Suitable for sustainable building certifications according to: DGNB, QNG, BNB, BREEAM, LEED

COMPOSITION:

Acrylic copolymers, wetting and defoaming agents, laid scrims, paper.

PROTECTION OF THE WORKPLACE AND THE ENVIRONMENT:

The product does not require any special labour protection measures. For reasons of working hygiene, we recommend avoiding eating, drinking and smoking during processing of this product. Store out of the reach of children. For more information refer to www.uzin.com or contact +49 731 4097-0.

DISPOSAL:

Empty shells and the cardboard packaging can be recycled. Material remnants can be disposed of as household waste.